



UIN-NVR3432-P16-V2

32-ch 4-SATA Ultra 265/H.265/H.264 PoE NVR



■ Features

- Support Ultra265/H.265/H.264 video formats
- 16/32-channel input
- Plug & Play with 16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 4 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade





UIN-NVR3432-P16-V2

32-ch 4-SATA Ultra 265/H.265/H.264 PoE NVR

■ Specification

Model	UIN-NVR3416-P16-V2	UIN-NVR3432-P16-V2
Video/Audio Input		
IP Video Input	16-ch	32-ch
Two-way Audio Input		1-ch, RCA
Network		
Incoming Bandwidth		160Mbps
Outgoing Bandwidth		64Mbps
Remote Users		128
Protocols		P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output		
HDMI/VGA Output	HDMI:4K (3840x2160@30), 1920X1080@60, 1920X1080@50, 1600X1200@60, 1280X1024@60, 1280X720@60,1024X768@60 VGA:1920X1080@60, 1920X1080@50, 1280X1024@60, 1280X720@60, 1024X768@60	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output		1-ch, RCA
Synchronous Playback	16-ch	32-ch
Corridor Mode Screen	3/4/5/7/9/10/12/16	3/4/5/7/9/10/12/16/32
Decoding		
Decoding format	Ultra265/H.265/H.264	
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2x4K@30,4x4MP@30,5x3MP@30,8x1080P@30,16x720P@30	2x4K@30,4x4MP@30,5x3MP@30,8x1080P@30,16 x 720P@30, 32 x D1@30
Hard Disk		
SATA	4 SATA interfaces	
Capacity	Up to 10TB for each disk	
External Interface		
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB3.0	
Serial Interface	1 x RS485	
Alarm In	16-ch	
Alarm Out	4-ch	
PoE		
Interface	16 RJ-45 10M/100M/100M self-adaptive Ethernet Interface	
Max Power	Max30Wforsingleport Max240Wintotal	
Supported Standard	IEEE 802.3af/at	
General		
Power Supply	100 ~ 240 V AC Power Consumption: ≤15W(without HDD)	
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)	
Dimensions (W×D×H)	400mm ×362mm × 74mm (15.7" × 14.2" ×2.9")	

* Product specifications may change without prior notice.






UIN-NVR3432-P16-V2

32-ch 4-SATA Ultra 265/H.265/H.264 PoE NVR


Available Model

UIN-NVR3432-P16-V2

Rear Panel

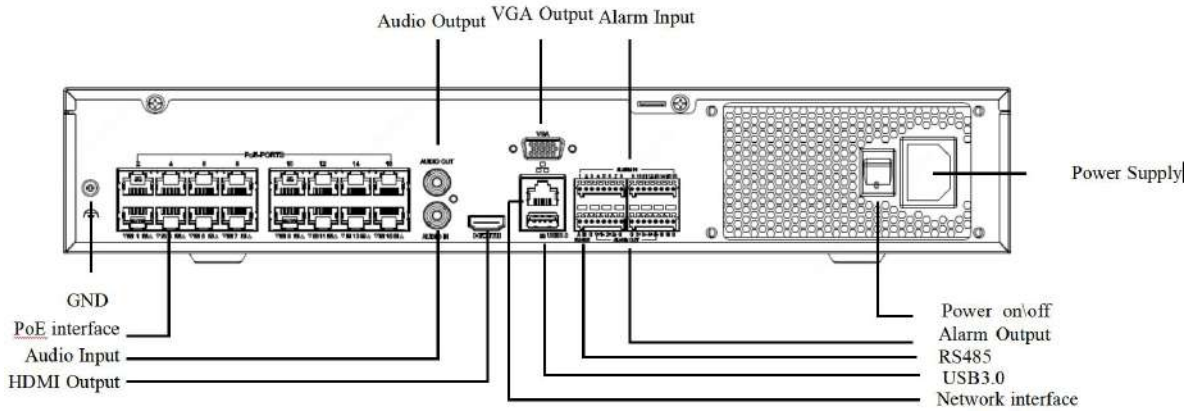

Dimension

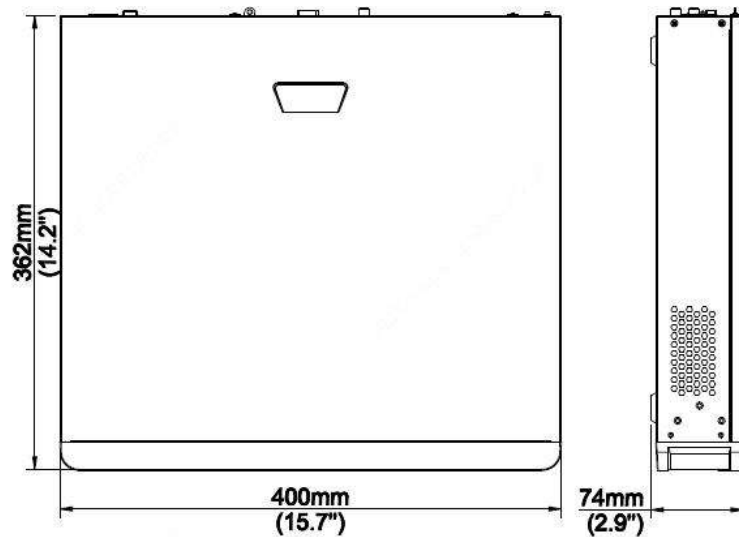

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

