




UIN-NVR3104/3108

4/8-ch 1-SATA NVR

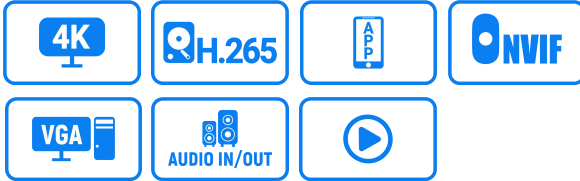

■ Features

- Support Ultra 265/H.265/H.264 video formats
- 4/8-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 4K resolution recording
- 1 SATA HDD up to 10 TB
- Support cloud upgrade





■ Specification

Model	UIN-NVR3104	UIN-NVR3108
Video/Audio Input		
IP Video Input	4-ch	8-ch
Two-way Audio Input		1-ch, RCA
Network		
Incoming Bandwidth		64Mbps
Outgoing Bandwidth		64Mbps
Remote Users		128
Protocols	P2P, UPnP, NTP, DHCP, PPPoE	
Video/Audio Output		
HDMI/VGA Output	HDMI:3840x2160/30Hz, 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA:1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Recording Resolution	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Synchronous Playback	4-ch	8-ch
Corridor Mode Screen	3/4	3/4/5/7/9
Decoding		
Decoding format	Ultra 265/H.265/H.264	
Liveview/Playback	4K/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	2 x 4K@30, 3 x 5MP@30, 4 x 4MP@30, 5 x 3MP@30, 8 x 1080p@30, 16 x 720p@30	
Hard Disk		
SATA	1 SATA interface	
Capacity	up to 10TB for each disk	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 1 x USB2.0, 1 x USB3.0	
General		
Power Supply	12V DCPower Consumption: ≤8 W (without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)	
Dimensions (W×D×H)	260mm × 240mm × 47mm (10.2"×9.4"×1.9 ")	
Weight (without HDD)	1.3kg (2.87 lb)	

* Product specifications may change without prior notice.






UIN-NVR3104/3108

4/8-ch 1-SATA NVR


■ Available Model

UIN-NVR3104 UIN-NVR3108

■ Rear Panel

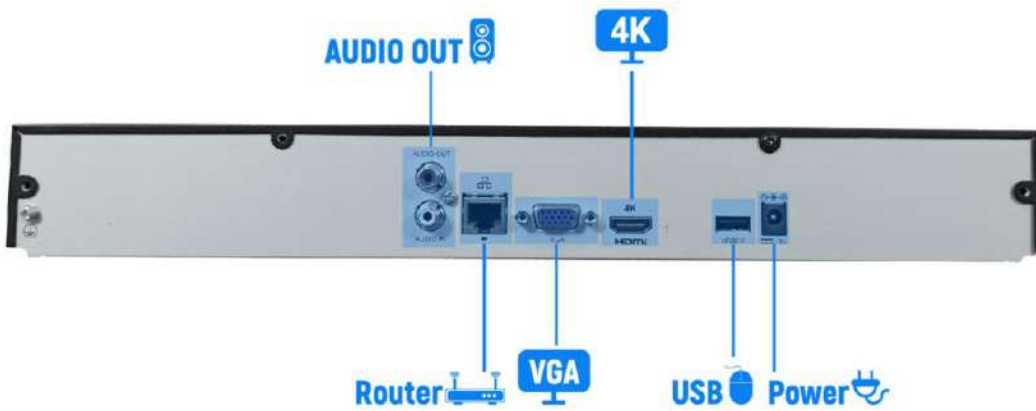

■ Dimension

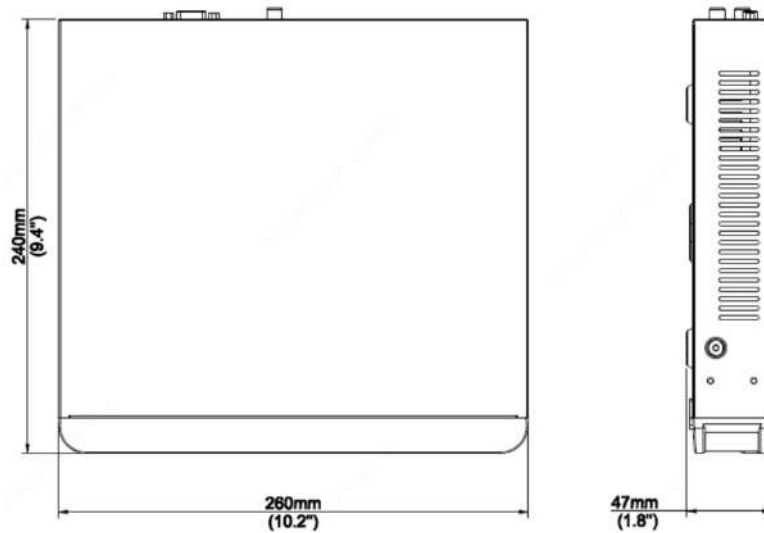

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

