



IPY-B728VUS

8 MP Full Color Fixed Bullet Network Camera



■ Features

- 1/2.8" Sony IMX415 CMOS sensor
- 8MP 4K UHD resolution 3840 x 2160 output
- Ultra low illumination 0.001Lux
- 24 hours color image view
- Day/Night, AWB, 2D/3D-DNR, IR-CUT,WDR/HDR
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 three-stream RTSP media server
- Easy-to-use P2P Cloud service
- Alarm snapshot to FTP and Email
- Storage to NAS via NFS protocol
- YouTube Live via RTMP Protocol
- Support user authentication, video data encryption, HTTPS security access
- Multiply WEB browser compatible, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 4 pcs smart warm light Led(3600K)
- Brightness auto adjust (0-100%) distance 30-40 meters
- Large aperture F1.0 3.6 mm fixed lens
- Built-in Mic





■ Specification

Camera	
Image Sensor	1/2.8" 8MP IMX415 CMOS
Effective Pixels	3840(H)×2160 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s, Manual
Min. Illumination	0.001Lux F1.0(AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
WDR	WDR/HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, shutter
Encode	
Video Standard	H.264/H.265/H.265+
Video Resolution	MainStream:20fps@8MP(3840x2160),30fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP,60fps@1080P/720PSub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc. Third stream:10fps@1080P/720P/CIF
Video Bitrates	64Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
OSD Overlay	Title and Time overlay
Event Alarm	
Human Detection	Yes
Motion Detection	Yes
Alarm Trigger Action	Snapshot/recording/APP alert/Email/FTP/Onvif
Warm Fill-lightLed	
Led	
Distance	30-40M
Lens	
Focal length	F1.0 large aperture 3.6mm fixed lens
Network Services	
Protocol	HTTP/HTTPS/RTSP/FTP/SMTP/DHCP/NTP/DST/NFS/RTMP
P2P	Yes
Web	IE Chrome Firefox Edge Safari
Media	LMS, Android, IOS
ONVIF	17.06 compatible
General	
Language	English/Chinese/Russian/German/Italian/Korean/Turkish/Pakistan
Network Port	1-RJ45, 100Mbps, PoE 48V in
Power Supply	12 VDC ± 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Housing Material	Aluminum Metal

* Product specifications may change without prior notice.






IPY-B728VUS

8 MP Full Color Fixed Bullet Network Camera

■ Available Model


IPY-B725VUS IPY-B728VUS (2.8/3.6mm)

■ Dimension

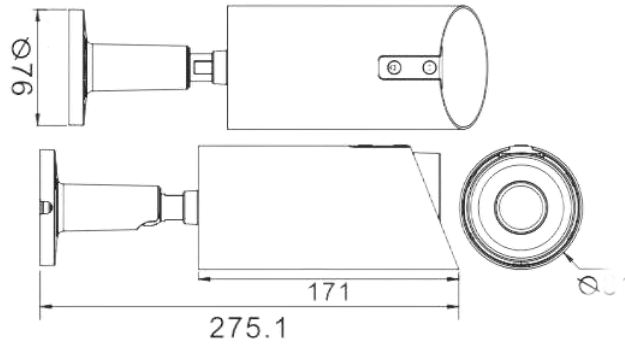

■ Accessory

■ Optional



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

