




# UIN-D3332BHH2-E4

32CH/4HDD/H.265/5MN no real-time DVR

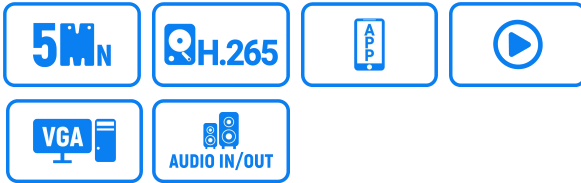

## ■ Features

- TVI / AHD / DVR / NVR / CVI five-in-one function, multi-mode input, support HD analog video encoding, support HD analog + HD network video input, support pure HD network video input.
- Easily implement network penetration through cloud services and remote monitoring in one step.
- Supports various mobile phone monitoring (iPhone Android).
- Support multiple web browsers (IE / Chrome / Firefox / Safari).
- Support VGA,TV,HDMI output at the same time.
- Powerful network services (supporting DHCP, PPPOE, FTP, DNS, DDNS, NTP, UPNP, Email, etc.), complete supporting facilities (WEB, client, SDK), easily achieve interconnection and interoperability.
- Supports more than 20 languages and breaks the limits of national borders.
- Freely change the startup interface and choose the interface style.
- Support basic intelligence and tripwire perimeter functions.
- Support coaxial audio.
- Support Dana Cloud Taoshi Cloud cloud platform customization.





## ■ Specification

<b>System</b>	Master chip	HI3531A
	AD chip	TP2830
	RAM	16G
	Compression format	H.265X
	operating system	Embedded Linux operating system
<b>Video</b>	Input	32
	Preview	32 * 5MN/12fps
	Coding	32 * 5MN/6fps
	Decoding	16 * 5MN/6fps
	VGA output	1080P
	BNC output	support
	HDMI output	1080P
<b>Audio</b>	Audio Input	16
	Audio output	1
	Coaxial audio	16
	Two-way intercom	support
<b>Playback</b>	Number of real-time recording channels	32-way non-real-time
	Video mode	Timing, manual, motion detection, external alarm
	The number of simultaneous playback	16
	Search mode	Point-in-time search, calendar search, event search, channel search
<b>Backup</b>	USB mobile harddisk, Udisk	support
	USB DVD burner	support
	Format	H.26X、AVI
<b>Remote access</b>	Browser	Supports multiple web browsers
	Client	Support VMS
	APP	Support for iPhone, Android
<b>Storage</b>	HDD number	4
	E-SATA	not support
<b>Network</b>	Network port	10 / 100/1000 Mbps Ethernet (RJ-45)
	Network protocol	TCP/IP, DHCP, DDNS, NTP, SMTP
<b>Other</b>	remote control	support
	power supply	DC12V /2A
	Work Temperature	-10°C ~60°C
	Working humidity	10% ~ 90% Humidity

\* Product specifications may change without prior notice.





## UIN-D3332BHH2-E4

32CH/4HDD/H.265/5MN no real-time DVR

### ■ Available Model

UIN-D3332BHH2-E4

### ■ Rear Panel

### ■ Dimension



**Uin Technology Co., Ltd.**

☎ +86-871 63586112

🏠 [www.uin-tech.com](http://www.uin-tech.com)

📍 4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

