



IPY-B92805DS

8 MP Built-in Mic Zoom 5X Varifocal Fixed Bullet Network Camera



■ Features

- 1/2.8" Sony IMX415 CMOS sensor
- 8MP 4K UHD resolution 3840 x 2160 output
- Ultra low illumination 0.01Lux
- Day/Night, AWB, 2D/3D-DNR, IR-CUT,WDR/HDR
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 three-stream RTSP media server
- Easy-to-use P2P Cloud service
- Alarm snapshot to FTP and Email
- Storage to NAS via NFS protocol
- Youtube Live via RTMP Protocol
- Support user authentication, video data encryption, HTTPS security access
- Multiply WEB browser compatible, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 20pcs SMD IR Led, IR distance 30-40 meters
- Motorized 2.7 - 13.5 mm AF lens
- Built-in Mic





IPY-B92805DS

8 MP Built-in Mic Zoom 5X Varifocal Fixed Bullet Network Camera

■ Specification

Camera

Image Sensor	1/2.8" 8MP IMX415 CMOS
Effective Pixels	3840(H)×2160 (V)
Electronic Shutter	AUTO, 1/25s ~ 1/100000s, Manual
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	WDR/HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror, shutter

Encode

Video Standard	H.264/H.265/H.265+
Video Resolution	MainStream:20fps@8MP(3840x2160),30fps@6MP(3072x2048)/5MP(2592x1944)/4MP/3MP,60fps@1080P/720PSub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc. Third stream:10fps@1080P/720P/CIF

Video Bitrates	64Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes
OSD Overlay	Title and Time overlay

Event Alarm

Human Detection	Yes
Motion Detection	Yes
Alarm Trigger Action	Snapshot/recording/APP alert/Email/FTP/Onvif

IR Led

IR Led	20 pcs SMD IR Led
IR Distance	30-40 M

Lens

Focal length	2.7 -13.5 mm AF lens
--------------	----------------------

Network Services

Protocol	HTTP/HTTPS/RTSP/FTP/SNTP/DHCP/NTP/DST/NFS/RTMP
P2P	Yes
Web	IE Chrome Firefox Edge Safari
Media	LMS, Android, IOS
ONVIF	17.06 compatible

General

Language	English/Chinese/Russian/German/Italian/Korean/Turkish/Pakistan
Network Port	1-RJ45, 100Mbps, PoE 48V in
Power Supply	12 VDC ± 10%
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH
Housing Material	Aluminum Metal

* Product specifications may change without prior notice.






IPY-B92805DS

8 MP Built-in Mic Zoom 5X Varifocal Fixed Bullet Network Camera

■ Available Model

IPY-B92805DS (2.7-13.5mm)

■ Dimension

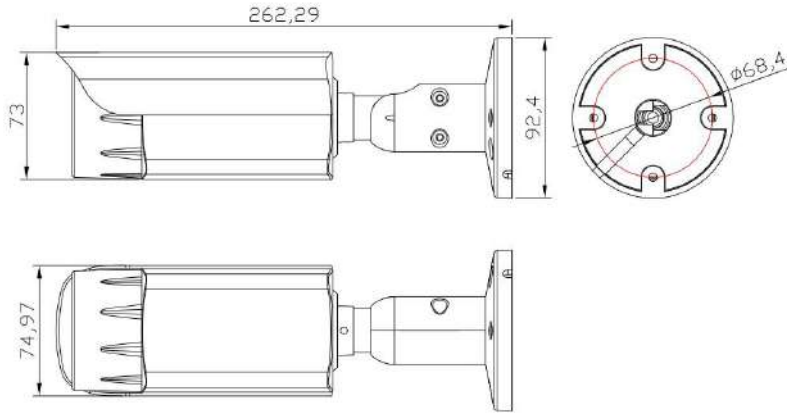

■ Accessory

■ Optional

JB-06



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

