




UIN-XVR3104-G3/ XVR3108-G3

4/8-ch 1-SATA 5MP XVR

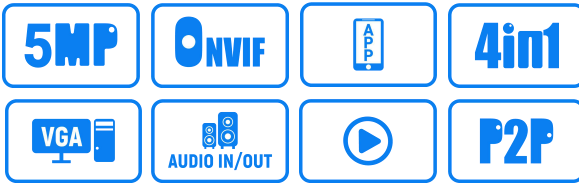

■ Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 4/8-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols





UIN-XVR3104-G3/ XVR3108-G3

4/8-ch 1-SATA 5MP XVR

■ Specification

Model	XVR3104-G3	XVR3108-G3
Video/Audio Input		
Analog Video Input	4-ch, BNC	8-ch, BNC
IP Video Input	2-ch(only IP up to 6ch), each channel up to 4MP Support AHD input: 5MP@20fps4MP@30fps1080P@30fps720P@60fps Support TVI input: 5MP@20fps4MP@30fps1080P@30fps720P@60fps Support CVI input: 5MP@20fps4MP@30fps1080P@30fps Support CVBS input	4-ch(only IP up to 8ch), each channel up to 4MP Support AHD input: 5MP@12fps4MP@15fps1080P@30fps720P@30fps Support TVI input: 5MP@12fps4MP@15fps1080P@30fps720P@30fps Support CVI input: 1080P@30fps720P@30fps Support CVBS input
Supported Analog Camera Types	5MP@20fps4MP@30fps1080P@30fps720P@60fps Support CVI input: 5MP@20fps4MP@30fps1080P@30fps Support CVBS input	5MP@12fps4MP@15fps1080P@30fps720P@30fps Support CVI input: 1080P@30fps720P@30fps Support CVBS input
Audio Input	1-ch, RCA	
Audio Compression	G.711U	
Video/Audio Output		
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
HDMI Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
Audio Output	1-ch, RCA	
Synchronous Playback	HD:2-chSD:4-ch	HD:4-chSD:8-ch
Live view display	HDMI/VGA: 1/4/6/8/9	HDMI/VGA: 1/4/6/8/9/16
Two-way Audio	1-ch, RCA	
Network		
Incoming Bandwidth	16Mbps (Up to 24Mbpsafter all analog channel conversion)	32Mbps (Up to 40Mbpsafter all analog channel conversion)
Outgoing Bandwidth	48Mbps	64Mbps
Remote Users	128	
Protocols	TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP	
Browser	IE(IE10/11) for WindowsFirefox (version 52.0 and above) for WindowsChrome(version 45 and above) for WindowsEdge(version 79 and above)for Windows	
Encoding		
Recording Resolution	5MP Lite/4MP Lite/1080P/720P/CIF	5MP Lite/4MP Lite /1080P/1080P Lite/720P/CIF
RecordingFrame Rate	Main stream: 5MP Lite@12fps 4MP Lite@15fps 1080P@15fps 720P@25fps Sub stream: D1@12fps D1@15fps D1@15fps D1@25fps	Main stream: 5MP Lite@6fps 4MP Lite@8fps 1080P Lite@12fps 720P@12fps Sub stream: D1@6fps D1@8fps D1@12fps D1@12fps
Audio Sample Rate	8KHz, 16 bit per channel	
Audio Bit Rate	64Kbpsper channel	
Decoding		
Capability	Analog: 2 x5MP Lite@12, 2 x 4MP Lite@15, 2x 1080P@15IP: 1 x 4MP@30, 2x 1080P@30	Analog: 4 x5MP Lite@6,4x 4MP Lite@8, 4x 1080PLite @12fpsIP: 1 x 4MP@30, 2x 1080P@30
Hard Disk		
SATA	1 SATA interface	
Capacity	Up to 8TB for each HDD(The maximum HDD capacity varies with environment temperature)	
General Alarm		
General Alarm	Motion detection	
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access,Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal	
External Interface		
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface	
USB Interface	Rear panel: 2 x USB2.0	
General		
Power Supply	12V DCPower Consumption: ≤ 8 W(without HDD)	
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)	
Dimensions(WxD×H)	260mm ×226mm× 47mm (10.2" × 8.9"×1.8")	
Weight (without HDD)	≤1.1Kg (2.42lb)	
Certification		
Certification	UL CE FCC RoHS	

* Product specifications may change without prior notice.





UIN-XVR3104-G3/ XVR3108-G3


4/8-ch 1-SATA 5MP XVR

■ Available Model


UIN-XVR3104-G3

UIN-XVR3108-G3

■ Rear Panel

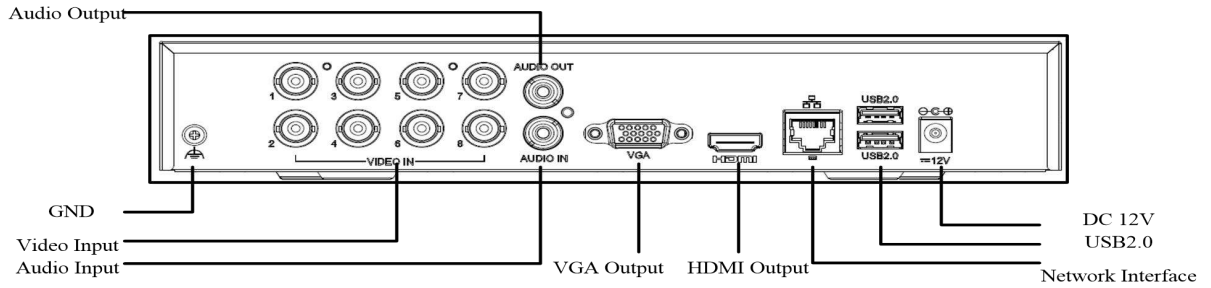

■ Dimension

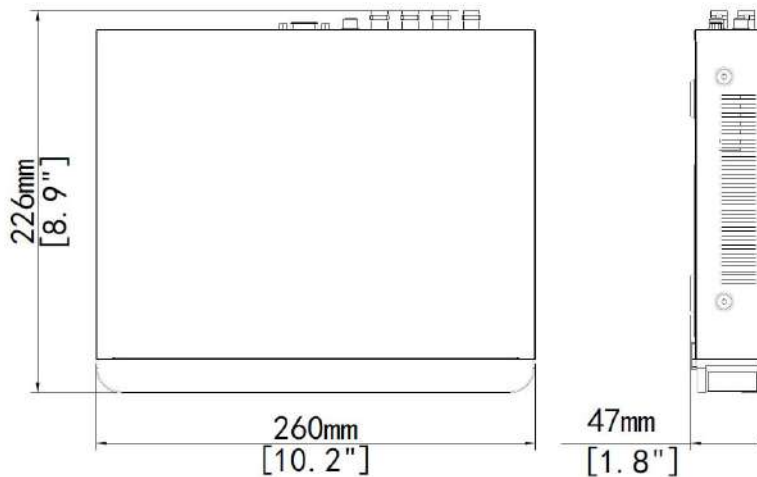

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

