




UIN-XVR3116-G3

16-ch 1-SATA 5MP XVR

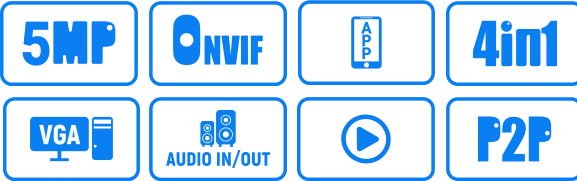

■ Features

- Support H.265/H.264 video formats
- Support audio over coaxial cable(only for TVI cameras)
- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Support 1-ch HDMI output, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support mainstream cameras of ONVIF and RTSP protocols





UIN-XVR3116-G3

16-ch 1-SATA 5MP XVR

■ Specification

Video/Audio Input

Analog Video Input	16-ch, BNC
IP Video Input	8-ch(up to 16-ch afteranalog camera conversion)
Supported Analog Camera Types	Support AHD input: 5MP@12fps4MP@15fps1080P@30fps720P@30fps Support TVI input: 5MP@12fps4MP@15fps1080P@30fps720P@30fps Support CVI input: 1080P@30fps720P@30fps Support CVBS input
Audio Input	1-ch, RCA
Audio Compression	G.711U

Video/Audio Output

VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	HD:8-chSD:16-ch
Live view display	HDMI/VGA: 1/4/6/8/9/16/25
Two-way Audio	1-ch, RCA

Network

Incoming Bandwidth	40Mbps (up to 56Mbpsafter all analog camera conversion)
Outgoing Bandwidth	64Mbps
Remote Protocols	128 TCP/IP, P2P, UPnP, DHCP, HTTP, HTTPS, DNS, DDNS, SMTP IE(IE10/11) for WindowsFirefox (version 52.0 and above) for WindowsChrome(version 45 and above) for WindowsEdge(version 79 and above)for Windows
Browser	Windows
Recording Resolution	5MP Lite/4MP Lite /1080P/1080P Lite/720P/D1/CIF
RecordingFrame Rate	Main stream: 5MP Lite@6fps 4MP Lite@8fps 1080P Lite@12fps 720P@12fps Sub stream: D1 @6fps D1 @8fps D1 @12fps D1 @12fps
Audio Sample Rate	8KHz,16 bit per channel
Audio Bit Rate	64Kbpsper channel

Decoding

Capability	Analog: 8 x5MP Lite@6, 8 x 4MP Lite@8, 8 x 1080PLite@12IP: 1 x 8MP@30, 2 x 4MP@30, 4x 1080P@30
------------	--

Hard Disk

SATA Capacity	1 SATA interface Up to 8TB for each HDD (The maximum HDD capacity varies with environment temperature)
---------------	---

General Alarm

General Alarm	Motion detection
Alert Alarm	IP Conflict, Network Disconnected, Disk offline, Disk Abnormal, Illegal Access,Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal

External Interface

Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
Serial Interface	1 x RS485

General

Power Supply	12V DCPower Consumption: ≤ 10 W(without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH(non-condensing)
Dimensions(W×D×H)	260mm ×226mm× 47mm (10.2" × 8.9"×1.8")
Weight (without HDD)	≤1.1Kg (2.42lb)

Certification

Certification	UL CE FCC RoHS WEEE
---------------	---------------------

* Product specifications may change without prior notice.





UIN-XVR3116-G3


16-ch 1-SATA 5MP XVR

Available Model


UIN-XVR3116-G3 (1 SATA)

UIN-XVR3216-Q3 (2 SATA)

Rear Panel

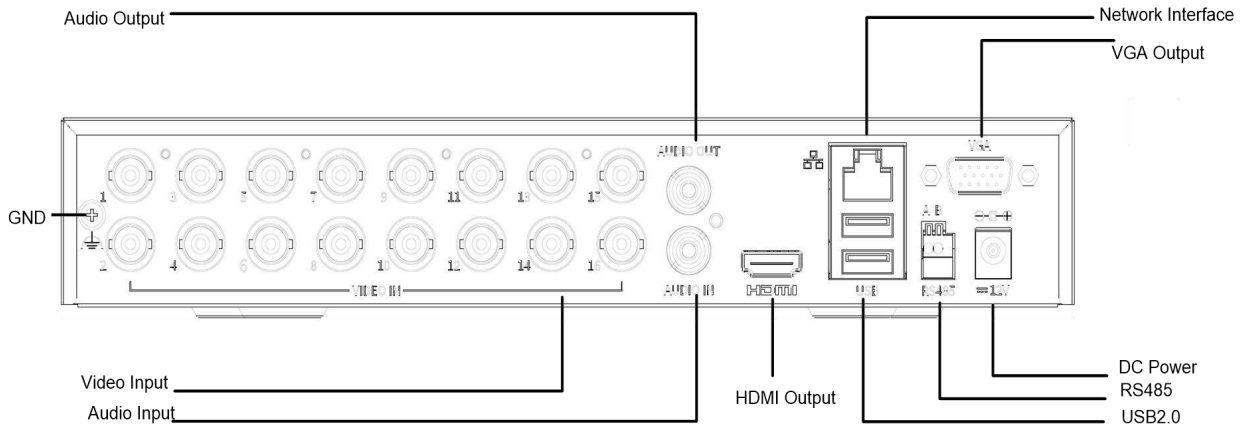

Dimension

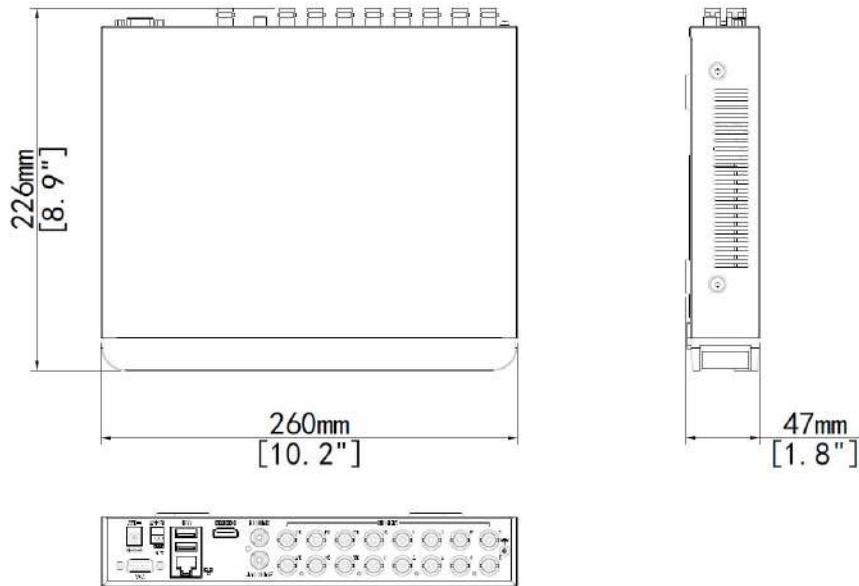

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

