



IPY-D368LDS2(B)

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera
Two way audio, Memory Slot



■ Features

- 1/2.7" CMOS sensor
- 8MP HD resolution 3840×2160 4K output
- Ultra low illumination 0.01Lux
- Day/Night (ICR), AWB, 2D/3D-DNR, IR-CUT
- D-WDR, Motion Detection, Privacy Mask, Flip
- RTSP and Onvif 17.06 compatible
- H.265/H.264 dual-stream media server
- Easy-to-use P2P Cloud service
- Multi web browser, PC Client, mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 2 pcs IR&warm-light Led, Light distance 20-30 meters
- HD 2.8mm F1.6 fixed lens
- Two-Way audio, SD slot, Reset button





IPY-D368LDS2(B)

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera
Two way audio, Memory Slot

■ Specification

Camera

Image Sensor	1/2.7" 8MP CMOS
Effective Pixels	3840×2160
Electronic Shutter	AUTO/Manual: 1/10s ~ 1/10000s, shutter threshold
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC/HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip, Reset button

Encode

Video Standard	H.264/H.265/H.265+
Video Resolution	Main Stream:20fps@3840x2160,25fps@3072x2048,30fps@5MP/2560×1440/2304×1296/1920×1080/1280×720Sub Stream:30fps@D1/VGA(640×480)/640×360,480×360,CIF(352×288)

Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
Memory Slot	Yes, maximum 512GB
OSD Overlay	Title and Time overlay, Snapshot

Smart Detection

Motion Detection	Support
Target Detection	Human and Vehicle Detection

Led

Led	2 pcs IR&Warm-light dual-wick Led
Distance	20-30 M

Lens

Focal length	F1.6 2.8 mm fixed lens
--------------	------------------------

Language

English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.

Network Services

Protocol	HTTP/RTSP/FTP/NFSv3/SMTP/DHCP/NTP/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari, etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible

General

Network Port	1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%
POE	802.3af/at 48V
Power Consumption	< 8 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

* Product specifications may change without prior notice.






IPY-D368LDS2(B)

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera
Two way audio, Memory Slot

■ Available Model

IPY-D368LDS2(B) (2.8/3.6mm)

■ Dimension

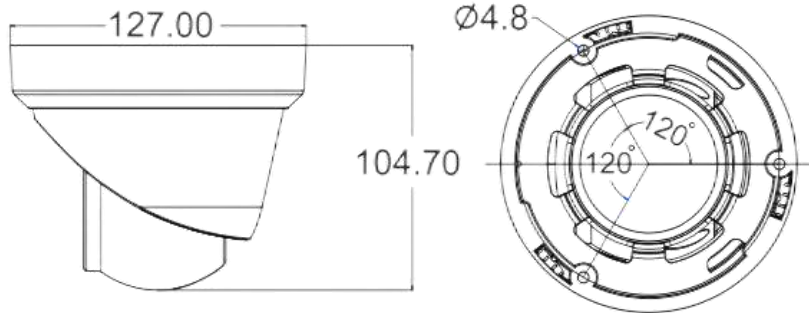

■ Accessory

■ Optional

ZJ-02



JB-04

