



IPY-D361203LDS2

12MP Smart Dual Light Two Way Audio SD slot Turret IP POE Camera
Moto Lens



■ Features

- 1/2.3" Sony IMX577 CMOS sensor
- 12MP resolution 4000 x 3000P
- Low illumination 0.01Lux
- Day/Night, AWB/MWB,BLC, HLC, 2D/3D-DNR,Shutter, IR-CUT
- D-WDR, Mirror, Defogging
- Multiply Style OSD Overlay,Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox 32bit ESR, PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af PoE
- Lightning protection 4000V
- Strong water-proof housing, IP67
- 4PCS dual light LEDs,soft and warm Light distance:30-40M , IR distance:30-40M
- 3.6-10mm Motorized Lens
- Built-in Microphone and speaker, two way audio, with SD card slot
- Human body and Vehicle detection





■ Specification

Camera

Image Sensor	1/2.3" Sony IMX577 CMOS
Effective Pixels	12 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR
White Balance	Auto/Manual
BLC /HLC	Support
DNR	2D/3D DNR
Light Control	Auto/Manual, Mode switch, Brightness level, OFF, Light ON Illumination
License Plate Mode	Yes
Other	Multi-lines OSD, Custom Title, Privacy Mask, Flip

Encode

Video Standard	H.265+/H.265/H.264
Video Resolution	MainStream:25/30fps@12MP(4000x3000)/8MP(3840x2160)/6MP(3072x2048)/5MP(2592x1944)/4MP/3MP/1080P/720P,etc. Sub stream: 720x480/VGA(640x480)/360P/QVGA@30fps,etc.
Video Bitrates	512Kbps - 12Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
Memory Slot	Yes, maximum 512GB
OSD Overlay	Title and Time overlay, Snapshot

Smart Detection

Motion Detection	Support
Target Detection	Human and Vehicle Detection

LED and distance

Led	4pcs IR&Warm-light dual-wick Led
IR Distance	30-40 M

Lens

Focal length	3.6-10mm Motorized Lens
--------------	-------------------------

Language

English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.

Network Services

Protocol	HTTP/RTSP/FTP/SMTP/DHCP/NTP/NFS, etc.
P2P	Yes
Web	IE , Firefox (32bit esr),Chrome ,Edge ,etc.
Media	CMS, Android, IOS
ONVIF	17.06 compatible

General

Network Port	1-RJ45, 100Mbps
Power Supply	12 VDC ± 10%
POE	802.3af/at 48V
Power Consumption	< 10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH






IPY-D361203LDS2

12MP Moto Lens Smart Dual Light Two Way Audio SD slot Turret IP POE Camera

■ Available Model



IPY-D361203LDS

■ Dimension

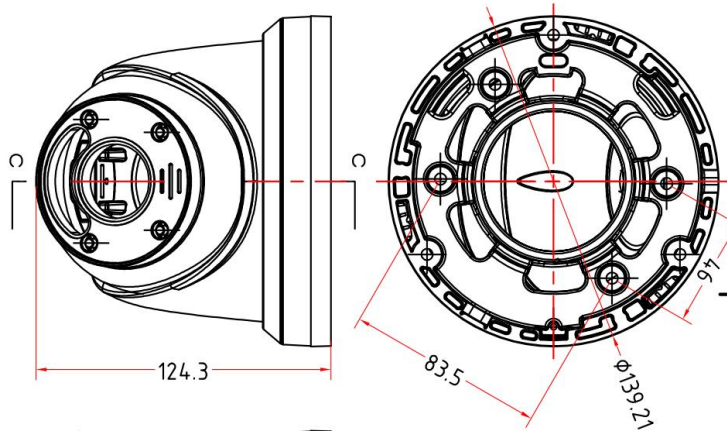

■ Accessory

■ Optional



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

