



# IPB-B618LS

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera



## ■ Features

- H.265/H.264 8MP IP/Network Dual Light Full Color Camera
- Up to 8 megapixel high resolution
- Max. 3840\*2160@20fps(50Hz/60Hz)
- Support RTSP&Onvif(17.2 with profile S)
- Compatible with many third-party NVRs and CMS
- Support multiply Web Browsers: IE/Firefox/Chrome/Safari etc.
- P2P Cloud service
- Free PC Client Software and Smartphone APP(P2P)
- Support Alarm Snapshot to Email and FTP
- Day/Night, AWB/MWB,BLC, 3D-DNR,Shutter, IR-CUT,
- D-WDR,Mirror, Image Flip etc. Functions
- 3.6mm F1.6 fixed lens
- Water-proof: IP66
- 12V DC&PoE
- Built in mic





## IPB-B618LS

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera

### ■ Specification

|                                      |   |
|--------------------------------------|---|
| <b>Camera</b>                        |   |
| Image Sensor:                        | 1/2.7" High sensitivity CMOS  |
| Signal System:                       | PAL/NTSC  |
| Min. Illumination:                   | Color: 0.05lux @(F1.6, AGC ON), 0 lux with IR or light  |
| Shutter Time:                        | 1/25 s to 1/10,000 s  |
| Lens:                                | 3.6mm fixed lens  |
| Day&Night:                           | 6pcs Dual Light   |
| Image Enhancement:                   | BLC/3D DNR  |
| Motion Detection:                    | Support   |
| Privacy Protection:                  | Support(4 Self-customized Areas)  |
| Smart function:                      | Humanoid detection, Vehicle detection   |
| Illumination for Infrared Switching: | 0.5~3Lux  |
| Infrared Wavelength:                 | 850nm   |
| Mimimum Illumination:                | 0 Lux(IR ON)  |
| LED Light Distance                   | (IR 20m)+(White Light :15m)   |
| Wather-Proof:                        | IP66  |
| <b>Compression Standard</b>          |   |
| Video Compression:                   | H.265/H.264   |
| Video Bit Rate:                      | 512Kbps~12288Kbps(main stream H.265)<br>64kbps~10240Kbps(sub stream H.265)  |
| Dual Streams:                        | Yes   |
| Triple Streams:                      | No  |
| <b>Image</b>                         |   |
| Image Resolution:                    | main stream:3840*2160(8MP)/2592x1944(5MP)/2560x1440(4MP)/1920x1080(1080p)<br>sub stream:720x480(D1)/640x480(VGA)/640x360/352x288(CIF) |
| Frame Rate:                          | main stream:20fps(8MP) max.<br>sub stream:25fps max   |
| Stream:                              | two streams   |
| Image Settings:                      | 3D NR, Image Flip, Saturation, Brightness, Contrast, Sharpness<br>adjustable via client software, web browser or Smartphone App       |
| <b>Audio</b>                         |   |
| Audio Compression:                   | G711U/G711A/AAC   |
| Audio Bitrate                        | 64K(G711)/16k(AAC)  |
| Audio In/Out:                        | No  |
| Build-in MIC:                        | Yes   |
| Volnume adject:                      | Yes   |
| <b>Network</b>                       |   |
| Network Protocols:                   | Http/Https, TCP/IP, IPv4/v6, UPNP, RTSP/RTMP,FTP, UDP, SMTP, NTP, DHCP, DNS,<br>DDNS,IP Search(Support P2P, NVR, NVS etc.)            |
| General Function:                    | Anti-Flicker, heartbeat, password protection, privacy mask, Watermark   |
| System Compatibility:                | ONVIF(17.2 with profile S)  |
| On-line Viewing                      | Max. Support 2 Users Simultaneously   |
| <b>Interface</b>                     |   |
| Communication Interface:             | 1 RJ45 10M / 100M Ethernet Interface  |
| Audio Interface:                     | No  |
| Alarm in/out interface:              | No  |
| SD card interface                    | No  |
| DC Power Plug:                       | DC Power Femate Interface/POE   |
| <b>General</b>                       |   |
| Operating Conditions:                | -10 °C ~ 60 °C<br>Humidity 95% or less (non-condensing)   |
| Power Supply:                        | 12 V DC ± 10%/PoE   |
| Power Consumption:                   | 12VDC±10%,Max Power Consumption Less than 8W(When the infrared lamps turn on)   |






## IPB-B618LS

8 MP Dual LED (IR & Color Vu) Fixed Turret Network Camera

### ■ Available Model

IPB-B615LS IPB-B618LS

### ■ Dimension

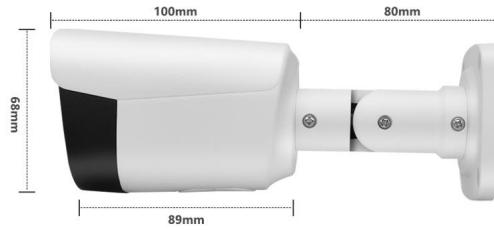

### ■ Accessory

### ■ Optional



**Uin Technology Co., Ltd.**

+86-871 63586112

[www.uin-tech.com](http://www.uin-tech.com)

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

