




# WFY-B915DS2

5MP Low light IR Two-way Audio  
Human Detection WIFI IP Camera

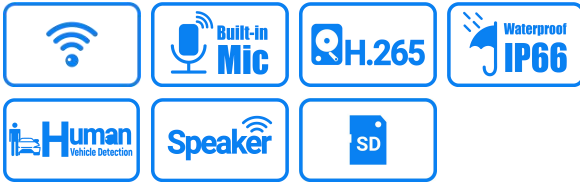

## ■ Features

- 1/2.7" CMOS sensor
- UHD resolution 2560 x 1920P
- Low illumination 0.01Lux
- Day/Night, AWB, 2D/3D-DNR, IR-CUT, Mirror
- OSD Overlay, Privacy Mask, Motion Detection
- RTSP and Onvif compatible with many third-party NVR
- H.264/H.265 dual-stream media server
- Easy-to-use P2P Cloud service, QR code scan
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multi web browser, PC Client, mobile APP remote access
- Two-way audio, built-in Mic and loudspeaker
- Built-in Micro-SD slot, max. 128GB
- Integrated 2.4G b/g/n wireless with 3DB Wi-Fi antenna
- RJ45 100mbps network port for wire connection
- Rear cable attached RESET button
- Lightning protection 4000V
- Strong water-proof housing, IP66
- 18 pcs SMD IR Leds, IR distance 20-30 meters
- HD 2.8 mm fixed lens





## WFY-B915DS2

5MP Low light IR dual-light Two-way Audio  
Human Detection WIFI IP Camera

### ■ Specification

#### Camera

Image Sensor	1/2.7" SC5238 CMOS
Effective Pixels	5 megapixels
Electronic Shutter	AUTO
Min. Illumination	0.01Lux@F1.2(AGC ON)
Day/Night	Auto/Color/(B/W)
System	PAL/NTSC
White Balance	Auto/Indoor/Outdoor
OSD Overlay	Yes
Image Mirror	Yes
Privacy Mask	Yes

#### Encode

Video Standard	H.265/H.264
Video Resolution	Main Stream:15fps@5MP/4MPSub Stream: 30fps@800x600/640x352
Video Bitrates	64Kbps - 6Mbps, VBR/CBR
Audio Standard	G.711/G.726
Audio Input	Built-in Mic
Audio Output	Built-in loudspeaker
Two-way Audio	Yes

#### IR Led

IR Led	18pcsSMD IRLeds
IR Distance	20-30 M

#### Lens

Focal length	2.8/3.6mm Fixed lens
--------------	----------------------

#### Network Services

Protocol	TCP/IP/HTTP/RTSP/FTP/SMTP/DHCP/NTP, etc.
P2P	Yes
Web	IE , Firefox, Chrome, Edge, Safari, etc. (flash video)
Media	CMS, Android, IOS
ONVIF	2.04 compatible
Alarm Event	Sound Alarm, Motion Detection, Email alert, snapshot FTP, SD Storage

#### General

Network Port	1-RJ45, 100Mbps
Wireless	2.4G b/g/n external 3DB antenna
Reset Button	Yes
Power Supply	12 VDC $\pm$ 10%
Power Consumption	<10 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

\* Product specifications may change without prior notice.






## WFY-B915DS2

5MP Low light IR dual-light Two-way Audio  
Human Detection WIFI IP Camera

### ■ Available Model

WFY-B915DS2

### ■ Dimension

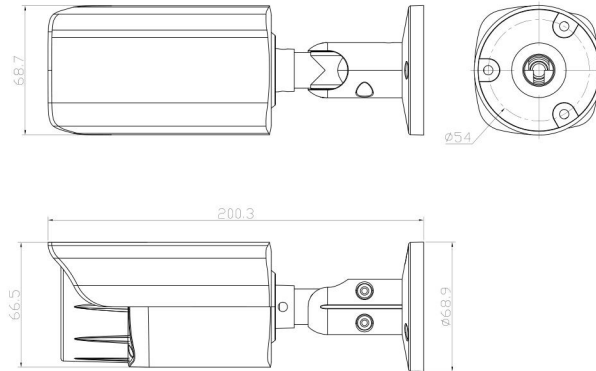

### ■ Accessory

### ■ Optional



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

