



IPY-Z34805DS2

4K Human and Vehicle Detection IR LED lights
5X Optical Zoom Two-way audio IP PTZ camera



■ Features

- 1/2.8" Sony CMOS sensor
- 8 MP HD resolution 3840×2160 4K output
- Low illumination 0.01Lux
- Network PTZ control , 5x optical zoom
- Smart Human and Vehicle Detection Alarm
- Built-in Mic and speaker, two-way audio
- Day/Night, AWB/MWB, BLC, HLC, 2D/3D-DNR, Shutter, IR-CUT
- D-WDR, Flip, Defogging
- Multiply Style OSD Overlay, Motion Detection, Privacy Mask
- RTSP and Onvif 17.06 compatible with many third-party NVR
- H.264/H.265 stream media server
- Easy-to-use P2P Cloud service
- Support user authentication, video data encryption
- Support Alarm Snapshot to Email and FTP
- Multiply WEB browser IE, Firefox, Chrome, Edge, Safari
- Free PC Client, Mobile APP remote access
- RJ45 100mbps network port, IEEE802.3af 48v PoE
- Lightning protection 4000V
- 8PCS SMD Array IR LEDs, IR Distance 30-40M
- 2.7-13.5 mm Motorized Auto Focus lens
- 350° horizontal rotation, 87° vertical range
- Rotation speed :50°/s
- Built-in SD slot&Reset





IPY-Z34805DS2

4K Human and Vehicle Detection IR LED lights
5X Optical Zoom Two-way audio IP PTZ camera

■ Specification

Camera	
Image Sensor	1/2.8" Sony CMOS
Effective Pixels	8 megapixels
Electronic Shutter	AUTO, 1/25s ~ 1/100000s
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on
Day/Night	Auto/Color/(B/W)/Timing
WDR	Digital WDR , HDR
White Balance	Auto/Manual
AGC/BLC/HLC	Support
DNR	2D/3D DNR
Other	Multi-lines OSD, Motion Detection, Privacy Mask, Mirror
Encode	
Video Standard	H.265+/H.265/H.264
Video Resolution	Main Stream: 20fps@3840x2160,25fps@3072x2048,30fps@5MP/2560×1440/2304×1296/1920×1080/1280×720 Sub Stream: 30fps@D1/VGA(640×480)/640×360,480×360,CIF(352×288) Third Stream: 10fps@1080P/720P/CIF(352×288)
Video Bitrates	512Kbps - 8Mbps, VBR/CBR
Audio Standard	G.711-u/G.711-a/AAC
Built-in Mic	Yes, Audio Echo Cancellation
Built-in Speaker	Yes, Two-way audio
Memory Slot	Yes, maximum 512GB
Smart Detection	
Motion Detection	Support
Target Detection	Human and Vehicle Detection
IR Led	
IR Led	8 pcs SMD Array IR Leds
IR Distance	30 -40M
Lens	
Focal length	2.7-13.5 mm AF Motorized lens
Zoom	5x optical zoom
PTZ	
Pan/Tilt Range	Pan: 0° ~ 350° ; Tilt: 0° ~ 87°
Preset Point	1
Control Speed	50° /Sec
Language	
English, simplified Chinese, Chinese Traditional, Deutsch, Italian, Turkish, Polish, Korean, Japanese, Russian, Ukrainian, Persian.	
Network Services	
Protocol	HTTP/RTSP/FTP/SNMP/DHCP/NTP/NFS/RTMP, etc.
P2P	Yes
Web	IE, Firefox, Chrome, Edge, Safari
Media	CMS, Android, IOS
ONVIF	17.06 compatible
General	
Network Port	1-RJ45, 100Mbps, POE optional
Power Supply	12 VDC ± 10%
Power Consumption	< 5 W
Operating Temp.	-30°C-(+60)°C, 10%-90%RH

* Product specifications may change without prior notice.






IPY-Z34805DS2

4K Human and Vehicle Detection IR LED lights
5X Optical Zoom Two-way audio IP PTZ camera

■ Available Model

IPY-Z34805DS2

■ Dimension

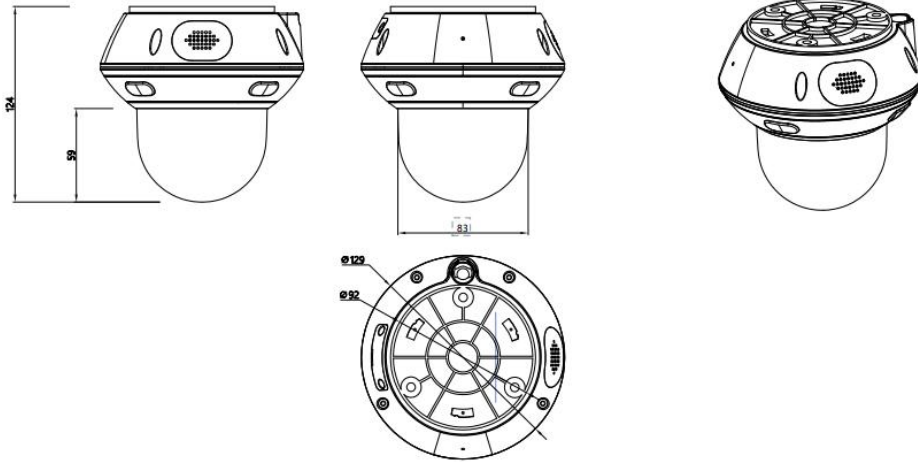

■ Accessory

■ Optional



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

