




UIN-IQNVR3104-P4-V3

4-ch 1-SATA Ultra 265/H.265/H.264 PoE
IQ NVR

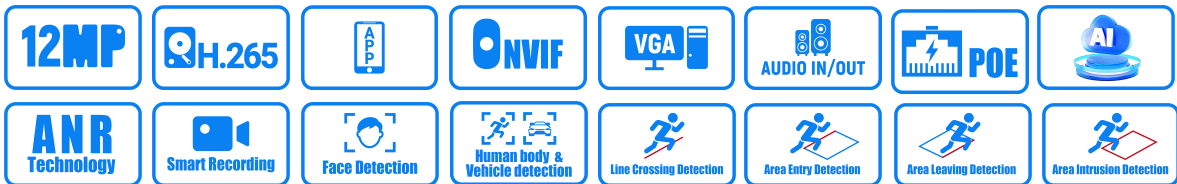

■ Features

- Support Ultra 265/H.265/H.264 video formats 4/8-channel input
- Plug & Play with 4/8 independent PoE network interfaces
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support HDMI and VGA simultaneous output
- Up to 12 Megapixels resolution recording
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

**UIN-IQNVR3104-P4-V3**

4-ch 1-SATA Ultra 265/H.265/H.264 PoE IQ NVR

■ Specification**Decoding**

Decoding Format Ultra 265,H.265,H.264

Decoding Smart Off: 2 x 12MP@30, 2 x 4K@30, 4 x 4MP@30

Capability Smart On: 2 x 4K@30, 4 x 4MP@30

Decoding

Capability The resolution of each channel cannot exceed 8192 pixels in length and 4096 pixels in width

Description

Audio G.711A, G.711U

Compression

Network

Incoming 80 Mbps

Bandwidth

Outgoing 80 Mbps

Bandwidth

Remote Users 128

Protocols TCP/IP, P2P, NTP, DHCP, PPPoE, , , DNS, DDNS, SNMP, SMTP, RTSP, IPv6, IPv4

Browser (Plugin) IE10, IE11, Chrome 45+, Edge 79+, Firefox 52+

Video/Audio Input

IP Video Input 4-ch

RCA Audio Input 1-ch

Video/Audio Output

HDMI Output 4K (3840 × 2160)/30 Hz, 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz

VGA Output 1920 × 1080/60 Hz, 1920 × 1080/50 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz

RCA Audio Output 1-ch

Liveview Display 1/4

Corridor Mode 3/4

Screen

Two-way Audio

Two-way Audio 1-ch,RCA(Using the audio input and output)

Snapshot

FTP/Schedule/Event Snapshot 4-ch snapshot (max. D1 (720 × 576) video resolution, with D1 snapshot resolution)

Recording

Recording 12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080P/960P/720P/D1/2CIF/CIF

Resolution

Num of

Concurrent 16-ch

Playback

* Product specifications may change without prior notice.



**UIN-IQNVR3104-P4-V3**

4-ch 1-SATA Ultra 265/H.265/H.264 PoE IQ NVR

■ Specification

Smart	
VCA Detection by IPC	Face Detection, Face Comparison, Vehicle Detection, SIP (Intrusion Detection, Cross Line Detection, Enter Area, Leave Area), Ultra Motion Detection (UMD), People Counting (People Flow Counting, Crowd Density Monitoring), Traffic Monitoring
Smart by NVR	Face Detection, Face Comparison, Smart Intrusion Prevention (SIP), Ultra Motion Detection (UMD)
VCA Search	Face Snapshot Search, Face Comparison Search, Motor Vehicle Search, Non-Motor Vehicle Search, Human Body Search, General Search, People Counting Report, Heat Map, AcuSearch
Smart by IPC	All channels (up to 8 images/s in total)Face Detection,Face Comparison,Vehicle Detection,SIP,UMD,Traffic Monitoring
Search by Image	Support
SIP by NVR	2-ch
UMD by NVR	4-ch
Alarm	
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Human Body Detection, Video Loss, Alarm Input, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
GUI Language	
GUI Language	38 languages: Simplified Chinese, Traditional Chinese, English, Vietnamese, Thai, Turkish, Spanish (Latin America), Portuguese (Brazil), Spanish, Portuguese, French, German, Italian, Dutch, Polish, Czech, Hungarian, Slovak, Russian, Hebrew, Arabic, Ukrainian, Estonian, Bulgarian, Greek, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenia, Serbia, Korean, Japanese, Latvian, Lithuanian, Persian
Hard Disk	
SATA	1 SATA Interfaces
Capacity	Up to 10 TB for each HDD (The maximum HDD capacity varies with environment temperature)
External Interface	
Network Interface	1 RJ45 10 M/100 M self-adaptive Ethernet Interface
USB	Rear panel: 1 × USB2.0, 1 × USB3.0
RS485	N/A
RS232	N/A
Alarm In	N/A
Alarm Out	N/A
Power Supply	DC 48 V/1.35 A
Power Switch	N/A
PoE	
PoE Interface	4 RJ45 10 M/100 M self-adaptive Ethernet Interface
Max Power	Max 30W for single port,Max 50W in total
Supported Standard	IEEE 802.3at,IEEE 802.3af

* Product specifications may change without prior notice.





UIN-IQNVR3104-P4-V3

4-ch 1-SATA Ultra 265/H.265/H.264 PoE IQ NVR

■ Specification

Working Environment

Working -10 °C ~ + 55 °C (+14 ㄱ ~ +131 ㄱ)

Temperature

Working Humidity ≤ 90% RH (non-condensing)

Power

Consumption ≤ 12W

(without HDD)

Dimensions

Weight (without ≤ 2.7Kg (6.0lb)

HDD)

Height 1U

Dimensions 260mm × 222mm × 47mm (10.2"×8.7"×1.8")

Certification

Certification CE; FCC; UL; RoHS; WEEE

CE EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035

FCC Part15 Subpart B

Compliance

NDAA Compliant Support






UIN-IQNVR3104-P4-V3

4-ch 1-SATA Ultra 265/H.265/H.264 PoE IQ NVR


■ Available Model

UIN-IQNVR3104-P4-V3

■ Rear Panel

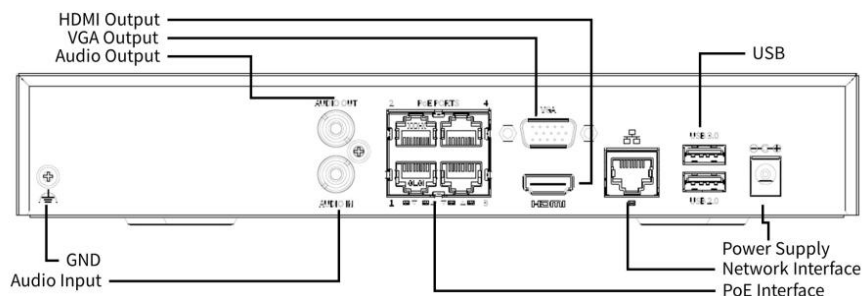

■ Dimension

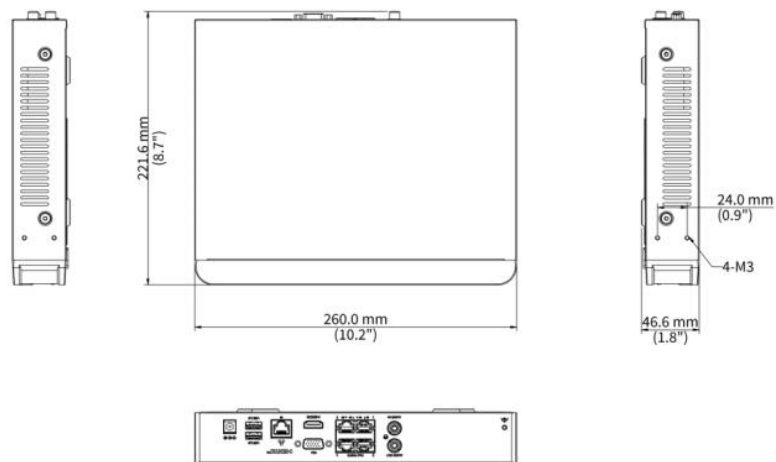

Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

