



IPY-D368LDS2RB

8MP Face Detection VCA AI Human & Vehicle Detection
Color Vu+Red Blue Flashlight PoE Turret IP Camera



■ Features

- 1/2.8" Sony CMOS
- 8MP(4K) resolution 3840 x 2160P
- Face Detection, Human & Vehicle Detection, Line Crossing, Area Entry/Leaving Detection, Area Intrusion Detection
- Low illumination 0.01Lux
- Day/Night, AWB/MWB, 2D/3D-DNR
- WDR, Motion Detection, Privacy Mask, Image Mirror, ROI
- RTSP and Onvif 2.3.12 Compatible
- H.265/ H.264 Dual-stream Media Server
- Easy-to-use P2P Cloud Service
- Multi web browser, PC Client, Mobile APP, Remote access
- RJ45 100Mbps Network Port, IEEE802.3af PoE
- Lightning Protection 4000V
- Strong Water-proof Housing, IP67
- 2PCS red and blue flashlight alarm Light(1 red & 1 blue)+2PCS IR & Warm Light LEDs, Light Distance 20-30M
- Warm Light on and Colorful Imaging When Detect Human Body or Vehicle
- 2.8mm F1.6 Fixed Lens
- Two way audio/ SD Slot / Reset button
- Support Audio Alarm to Warn Intruders off





IPY-D368LDS2RB

8MP Face Detection VCA AI Human & Vehicle Detection
Color Vu+Red Blue Flashlight PoE Turret IP Camera

■ Specification

Camera	
Image Sensor	1/2.8" 8MP Sony IMX415 CMOS
Soc Chip	Sigmastar SSC378DE
Effective Pixels	3840(H)×2160 (V)
Exposure Shutter	AUTO/Manual: 1/10s ~ 1/8000s, Max Shutter speed adjustable
Day/Night	Auto(Active/passive/schedule)/Day/Night, switch threshold, sensitivity, anti-flicker(Auto/50Hz/60Hz)
Image Adjust	Brightness, Saturation, Sharpness, Contrast, Denoise (0-100%) adjustable
White Balance	AWB/MWB
WDR	Yes
Light Mode	Smart(dual-light) / IR / White light, adjustable
Light Control	Auto/Manual, Brightness level (0-100%) adjustable
DNR	2D/3D DNR
Encode	
Video Standard	H.264/H.265
Video Resolution	Main Stream: 20fps@8MP(3840x2160)(default), 30fps@6MP(3072x2048)/5MP(2592x1944)/4MP(2560x1440)/3MP(2304x1296)/1080P/720P Sub stream: 10fps@720P, 30fps@D1(704x576)(default)/(720x480)/VGA(640x480)/QVGA(640x360)
Video Bitrates	Main stream: 64kbps-8Mbps Sub stream: 64kbps-2048kbps VBR/CBR, quality(1-9), GOP(1-128) Sub Stream(SD) snapshot
Image Snapshot	0 / 90 / 180 / 270 degree adjustable
Image Rotation	X crop, Y crop
Border Crop	horizon / vertical / horizon&vertical adjustable
Image Mirror	Font size(1-4), position, Time, Title, AM/PM, Color, User OSD, Alarm OSD
OSD Overlay	4 areas
Privacy Mask	ROI: Each stream support 8 areas
Region of Interest	G.711-u/G.711-a/AAC/PCM, AEC
Audio Standard	Yes
Built-in Mic	Yes
Built-in Speaker	Yes
LED and Distance	
LEDs	2PCS red and blue flashlight alarm Light(1 red & 1 blue)+2PCS IR & Warm Light LEDs
Light Distance	20-30M
Lens	
Focal length	2.8mm F1.6 Fixed Lens
Language	
English, simplified Chinese, Chinese Traditional, Japanese, Korean, German, Polish, Italian, Turkish, Ukrainian, Russian, etc.	
Smart Detection	
Motion Detection	Yes
Digital IO Alarm	1 pair Alarm-in/Alarm-out, normally open/normally close (optional)
Human Vehicle Detection	Yes, (2-20 meters)
Cross Line Detection	Yes, 4 lines
Perimeter protection	Yes, 4 areas
Face Detection	Yes, (1-5 meters)
Target Detection Type	Human Shape, vehicle, non-motor vehicle, Pet, Face (12px-1000px)
Trigger Action Linkage	Snapshot, Record, Relay(Red-blue Led flash) optional, White LED Flash, Voice siren, Micro-SD, Email, FTP, NAS storage (NFS)
Simultaneous Detection	Maximum 16 targets simultaneous detection
Storage Type	Schedule/Trigger: Micro-SD(512G), Email, FTP, NAS
Reset button	YES
Network Services	
Protocol	HTTP(s)/RTSP/FTP/SMTP/DHCP/NTP/DST/RTP/RTMP/P2P/HiK/IPv4/IPv6/NFS/DDNS
IP Address Filtering	Yes (Allow list, Deny list)
P2P Mobile APP	Android, IOS
Web Access	IE, Firefox, Chrome, Edge, Safari, etc. (Windows/Linux/Mac/Chromebook/Tablet/Mobile phone)
PC Tool	Windows, Mac
ONVIF	23.12 compatible (profile S G T M)
General	
Network Port	1-RJ45, 100Mbps, POE(IEEE802.3af)
Power Supply	12 VDC ± 10%
Power Consumption	< 8 W
Operating Temp.	-20°C-(+60)°C, 10%-90%RH

* Product specifications may change without prior notice.






IPY-D368LDS2RB

8MP Face Detection VCA AI Human & Vehicle Detection
Color Vu+Red Blue Flashlight PoE Turret IP Camera

■ Available Model

IPY-D368LDS2RB (2.8/3.6mm)

■ Dimension

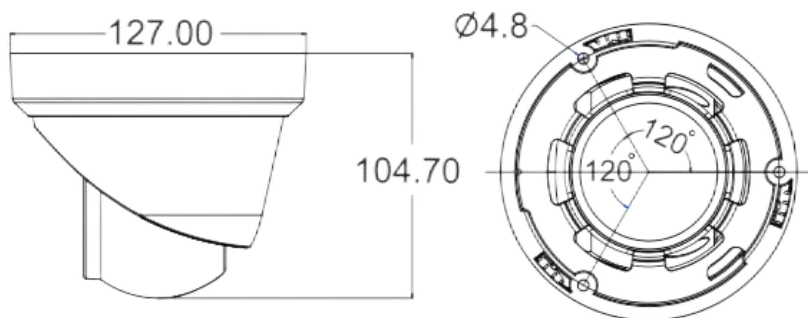

■ Accessory

■ Optional

ZJ-02



JB-04



Uin Technology Co., Ltd.

+86-871 63586112

www.uin-tech.com

4F,Block 7 Lijincheng High Tech Garden,Longhua District,Shenzhen China

